

# Style MM5594: Brass Wire Inserted Tacky Cloth (Standard)

**REVISED: SEPTEMBER 6, 2011**

Un-vulcanized natural rubber (solvent-based) coated on a texturized fiberglass fabric with brass wire. Fabric is intended to be used as a base material for the manufacturing of boiler handhole and manhole gaskets, door seals, tadpole tapes, etc.

Base Fabric: 32 oz

Weave: Plain


Coating Details: 15 oz of Coating per Side

Coated Fabric Details: 60 oz (+/- 3 oz/sy)

Thickness: 0.07"

PSI: 300 (Maximum)

Service Temperature: 500°F (Maximum)

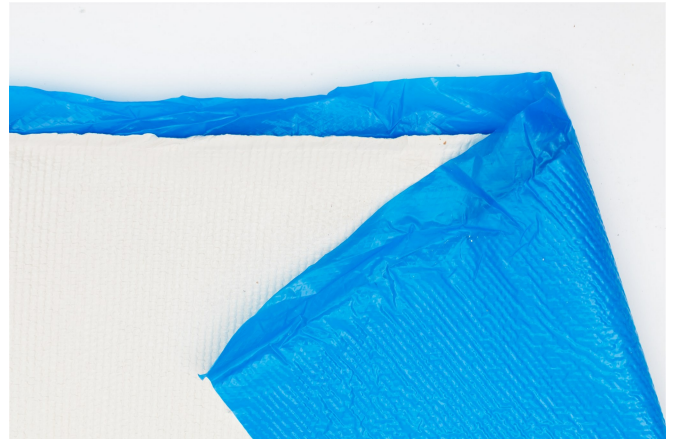

Optional Available Treatments: Dusted Both Sides,  
Graphited Both Sides, Red & Black