


Style PG650: Premium-Grade Fiberglass Tape with Vermiculite Coating and PSA

0.065" Thick with Vermiculite Coating and PSA

REVISED: SEPTEMBER 6, 2011

Premium Grade fiberglass tape offers superior insulating properties as well as low chloride content. Will resist most acids and alkalis and will remain unaffected by solvents and bleaches.

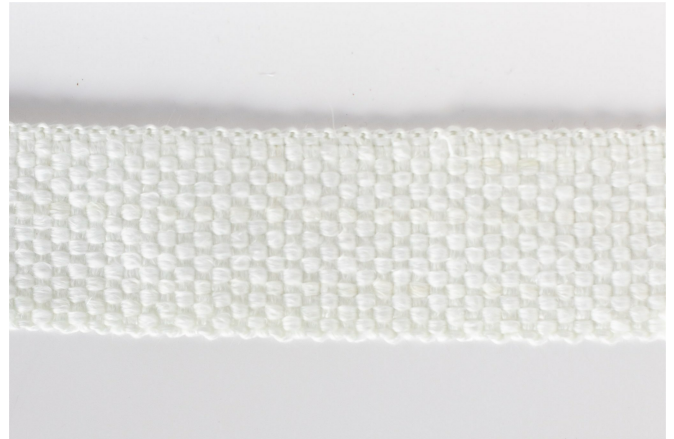

Base Material: Texturized E-Glass

Weave: Plain

Thickness: 0.065" (+/- 10%)

Width: 1/2" - 6" Standard

Roll Length: 100 ft

Service Temperature: 2000°F Intermittent

Coating: Vermiculite - Natural Color

SPEC FOR PSA

Total Thickness (not including liner): 3.2 mil

Adhesive Thickness (liner side): 1.25 mil

Adhesive Thickness (exposed side): 1.45 mil

Carrier Thickness (polyester film): 0.5 mil

Release Liner Thickness (60# kraft): 3.5 mil

Adhesive Color: Clear Amber